NOTES:

① JUNCTION BOXES: J2--EMERGENCY POWER. BOTH E4 BOXES ARE TO BE J2 WITH KNOCK OUTS ON END PLATES. WIRES TO BE CAPPED ON BOTH ENDS FOR FIELD CONNECTIONS AT EITHER END USING HEALTH CARE FACILITIES AC OR MC (HCFAC/HCFMC) CABLE.

② GAS PIPING: HOSE CONNECTED GAS OUTLETS. PANEL LAMINATE COLOR: TO BE DETERMINED.

③ ALL EXPOSED METAL SURFACES ARE TO HAVE A POWDER COATED FINISH THAT MATCHES FORMICA #923 "SURF", EXCEPT FOR THE HORIZONTAL CHANNELS WHICH ARE ANODIZED ALUMINUM.

MODULAR SERVICES COMPANY	500 EAST BRITTON ROAD OKLAHOMA CITY, OK 73114
PROJECT	
REVISED	

PROVIDER PLUS®
SINGLE TIER
MODEL 6540-AC

SCALE: =1'

DATE	DRAWN BY	DRAWING #
--/--/--	---	PB-218

SERVICES TO BE REVERSED
ON OPPOSITE HAND UNITS

__ REQ'D: __ AS SHOWN
__ OPPOSITE

LEGEND

REQ	SYM	DESCRIPTION
2	O	OXYGEN OUTLET, BEACON SERIES B DISS STYLE THREADED TYPE
2	A	AIR OUTLET, BEACON SERIES B DISS STYLE THREADED TYPE
2	V	VACUUM OUTLET, BEACON SERIES B DISS STYLE THREADED TYPE
2	E4	DUPLEX RECEPTACLE, 8300 RED, 20A, 125V, H.G., EMER. POWER
2	HC	HORIZONTAL ACCESSORY CHANNEL

QTY	ACCESSORIES NOT SHOWN (PER UNIT)

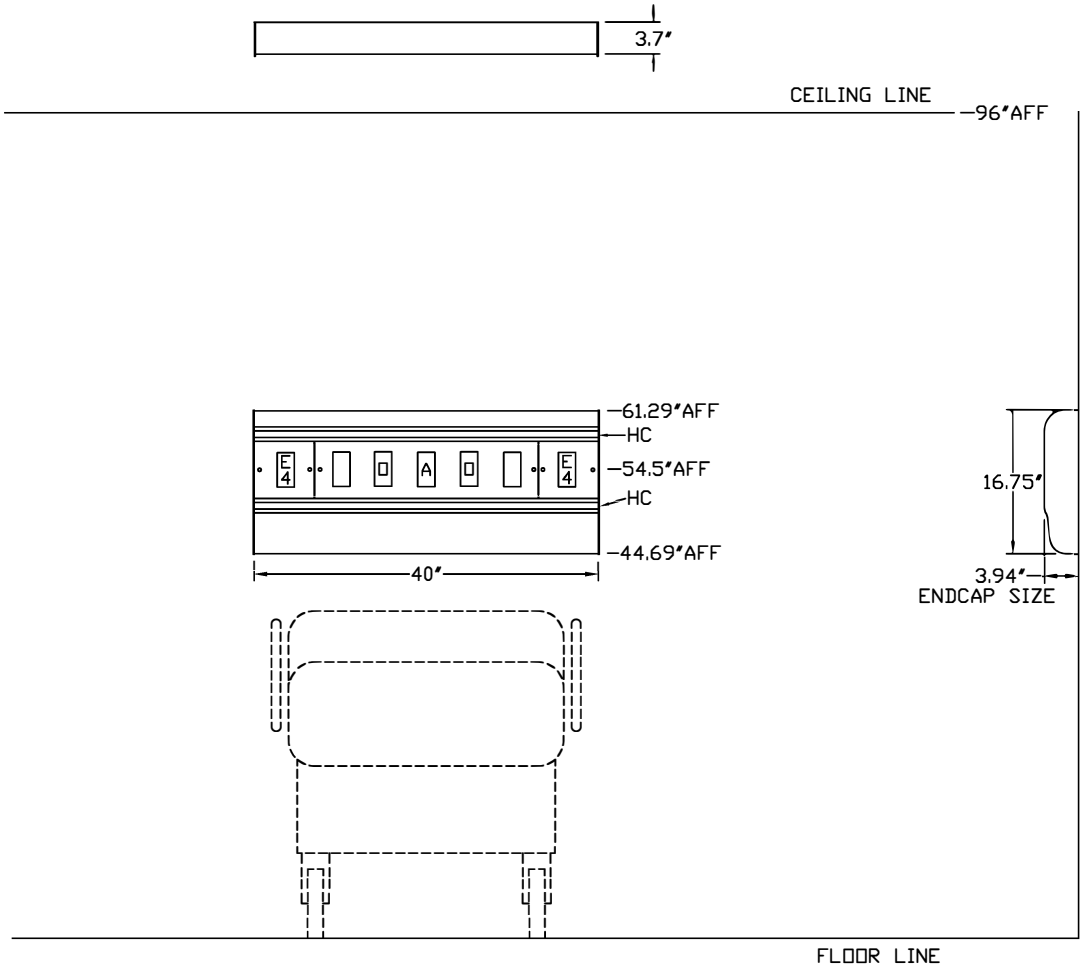

WIRING DIAGRAM

GROUND WIRING TO BE
GREEN STRANDED COPPER.