NOTES:

1. J-BOXES: J1--NORMAL POWER. LINE VOLTAGE TO BE 1/2" EMT CONDUIT. 3/4" EMT CONDUIT STUB-UPS PROVIDED FOR LOW VOLTAGE CONNECTIONS (BY OTHERS).
2. DEVICE MOUNTING PANELS: 3D LAMINATE SELECTION TO BE DETERMINED. WOOD GRAIN TO BE IN A VERTICAL ORIENTATION.
3. HARDWARE TO BE MSC STANDARD.
4. DEVICE COVER PLATES TO BE STAINLESS STEEL.
5. FORM® UNIT IS SURFACE MOUNTED IN VERTICAL SECTIONS (BY OTHERS).
6. INSET SURFACE PROVIDED FOR BASE MATERIAL (BY OTHERS).
7. ACTUAL OUTER PANEL WIDTHS WILL BE THE MODULE + 1 1/2".
8. BLOCKING REQUIRED IN THIS AREA.
9. ITEM SHOWN FOR PRESENTATION PURPOSES ONLY. SUPPLIED BY OTHERS.

MODULAR SERVICES COMPANY
500 EAST BRITTON ROAD
OKLAHOMA CITY, OK 73114

PROJECT

REVISED

FORM® BENCHWALL
7500 SERIES
FLOOR MOUNTED SYSTEM

SCALE: =1'

| DATE | DRAWN BY | DRAWING # |
|---|---|---|
| | | |

NOT FOR CONSTRUCTION
CONCEPTUAL ONLY

## LEGEND

| REQ | SYM | DESCRIPTION |
|---|---|---|
| 1 | USB | USB CHARGER RECEPTACLE, HUBBELL, 20A, 125V AC, WHITE, USB8300W |
| 1 | DP | DATA OUTLET PROVISION SINGLE GANG OPENING W/BLANK FACEPLATE |
| 1 | CH | COAT HOOK |
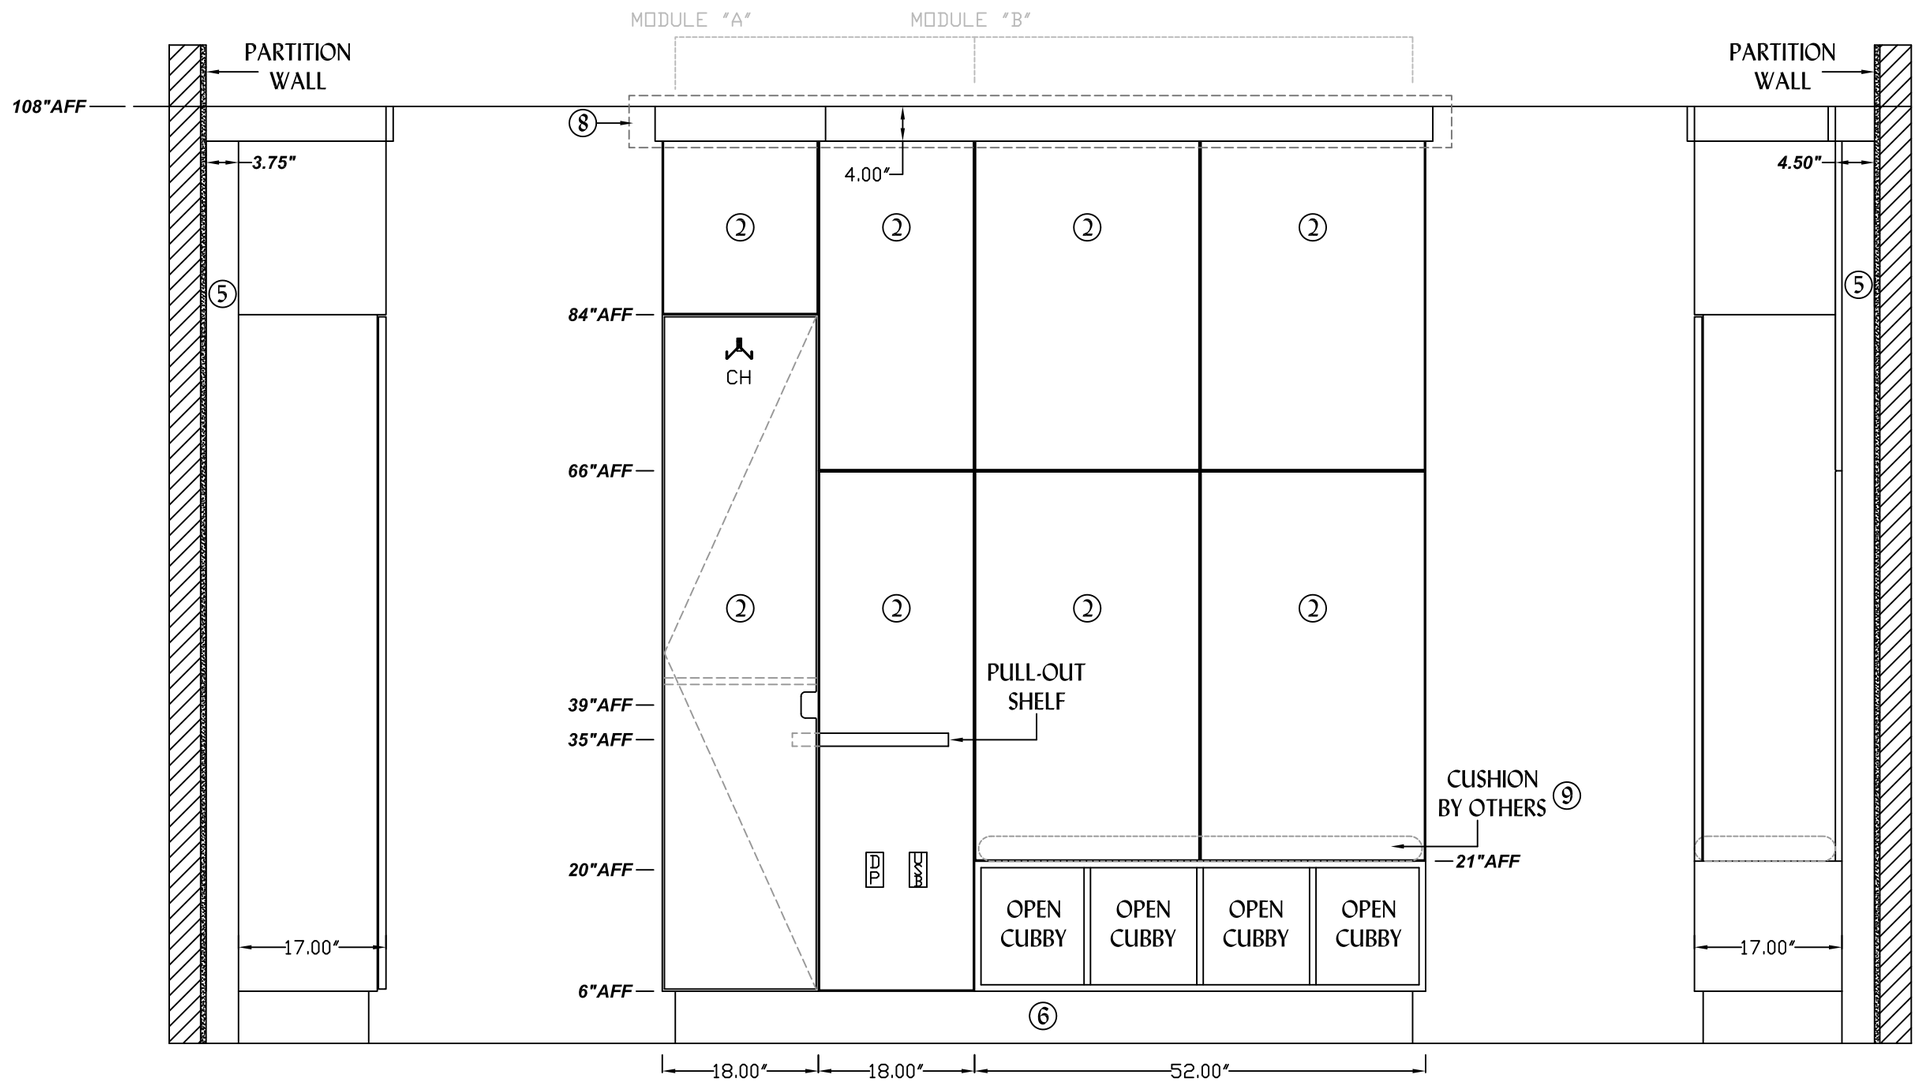
| REQ | ACCESSORIES NOT SHOWN (PER UNIT) |
|---|---|
| | |