NOTES:

① WIRING TO BE FED THROUGH CONDUIT TO TERMINATION POINTS AT TOP OF UNIT. MINIMUM 3' OF EXCESS WIRE COILED AT END FOR FIELD CONNECTIONS.
② GAS PIPING: TYPE L COPPERTUBING. OXYGEN & AIR--1/2" I.D., VACUUM--3/4" I.D.
③ DEVICE MOUNTING PANELS; POWDER COATED TO MATCH FORMICA #923 "SURF".
④ VERTICAL TRACKS & SIDE FRAMING FINISH TO BE PLATINUM GREY. DEVICE COVER PLATES ARE TO BE STAINLESS STEEL.
⑤ UNIT IS SURFACE MOUNTED FLOATING TYPE. SERVICES ARE TOP FED.
⑥ PROVIDE BLOCKING IN THIS AREA. REFER TO INSTALLATION INSTRUCTIONS.
⑦ MEDICAL GAS OUTLETS AND ELECTRICAL DEVICES TO BE MSC STANDARD BRAND.

LEGEND

REQ	SYM	DESCRIPTION
2	O	OXYGEN OUTLET
2	A	AIR OUTLET
2	V	VACUUM OUTLET
2	SL	VACUUM BOTTLE SLIDE
8	E2	DUPLEX RECEPTACLE, 8300 IVORY, 20A, 125V, H.G., NORMAL POWER
2	DP	DATA OUTLET PROVISION
2	IB	INTERNAL BRACING ONLY FOR MONITOR CHANNEL AND BRACKET
2	VTF	VERTICAL EQUIPMENT MOUNTING TRACK, FORWARD FACING
2	MA	MOUNTING ANGLE OR BRACKET

QTY	ACCESSORIES NOT SHOWN (PER UNIT)

MODULAR SERVICES COMPANY 500 EAST BRITTON ROAD OKLAHOMA CITY, OK 73114

REVISED

FLATWALL
4500 SERIES, MODEL 4540-S
SURFACE MOUNT SYSTEM

SCALE: =1'

DATE	DRAWN BY	DRAWING #
--/--/--	---	PB-217

SERVICES TO BE REVERSED ON OPPOSITE HAND UNITS

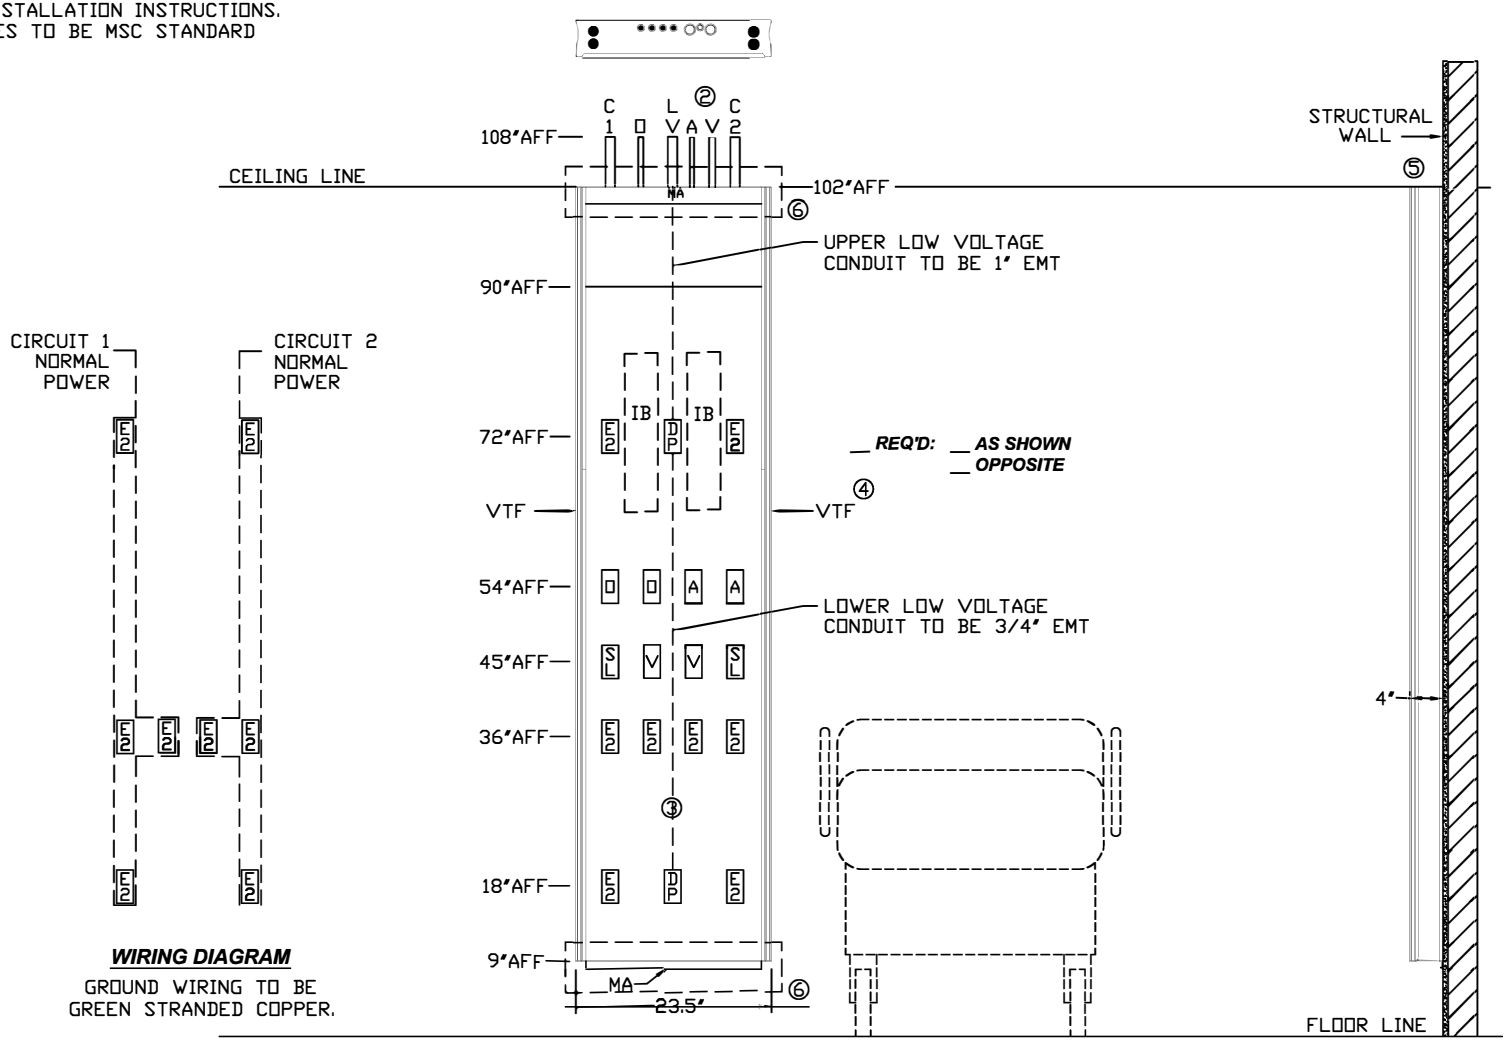

WIRING DIAGRAM

GROUND WIRING TO BE GREEN STRANDED COPPER.